


endura

ultimate performance underlay

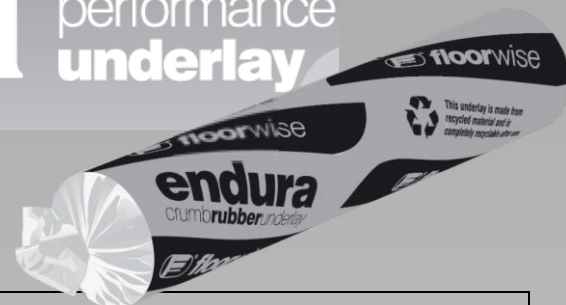

Specification (Typical Values)

Surface(s)	Polyester Jute Woven Backing	
Core	Recycled Crumb Rubber – Silver	+5% -0%
Thickness	6.75mm	±5%
Roll Weight	39 Kg	-5%+10%
Roll Size	11m x 1.37m = 15.07m ²	Width ±2cm Length +15cm

BS5808 1991 (2005) Standards for Carpet Underlay

Loss in Thickness after Static Loading	BS4939	<5%
Loss in Thickness after Dynamic Loading	BS4052	<5%
Work of Compression After Dynamic Loading	BS4098	>85 J/m ²
Retention of Work of Compression	BS4098	94%
Flammability – Hot Metal Nut Test	BS4749	Low Radius of Effects
End Use Classification	BS5808	HC/U Heavy Contract Use

Floorwise Reference: F9EN/2/Sept 2014

Thermal Resistance	BS4745	1.2 Togs
Impact Sound Improvement	ISO 140-8	Δ LW 31 dB

