


lift

high performance underlay

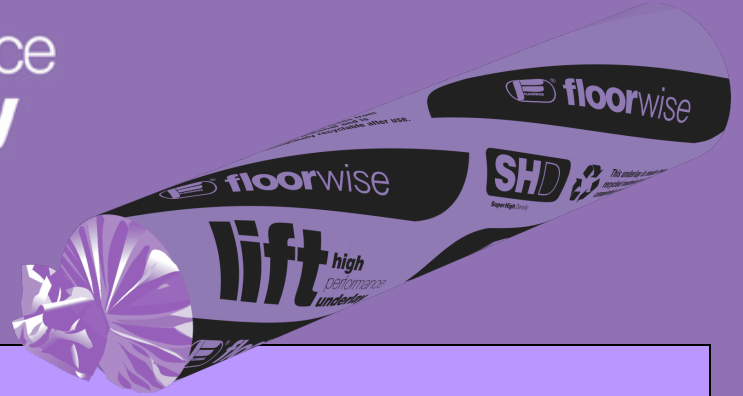

Specification (Typical Values)			
Surfaces	Purple Polymer Film with stabilising Mesh Grid		
Core	UH+	Super High Density Recycled Industrial Foam	+5% -0%
Thickness	7mm		±5%
Roll Weight	19.8 Kg		-5%+10%
Roll Size	11m x 1.37m = 15.07m ²		Width ±2cm Length +15cm

BS5808 1991 (2005) Standards for Carpet Underlay		
Loss in Thickness after Static Loading	BS4939	<5%
Loss in Thickness after Dynamic Loading	BS4052	<5%
Work of Compression After Dynamic Loading	BS4098	>150J/m ²
Retention of Work of Compression	BS4098	>90%
Flammability – Hot Metal Nut Test	BS4749	Low Radius of Effects
End Use Classification	BS5808	HC/U Heavy Contract Use

Floorwise Reference: F9LF/2/May 2017

Thermal Resistance	BS4745	2.02 Togs
Impact Sound Improvement	ISO 140-8	Δ LW 35 dB



When used as a double stick installation lay the roll with the print side up.

